




2025 CATALOG

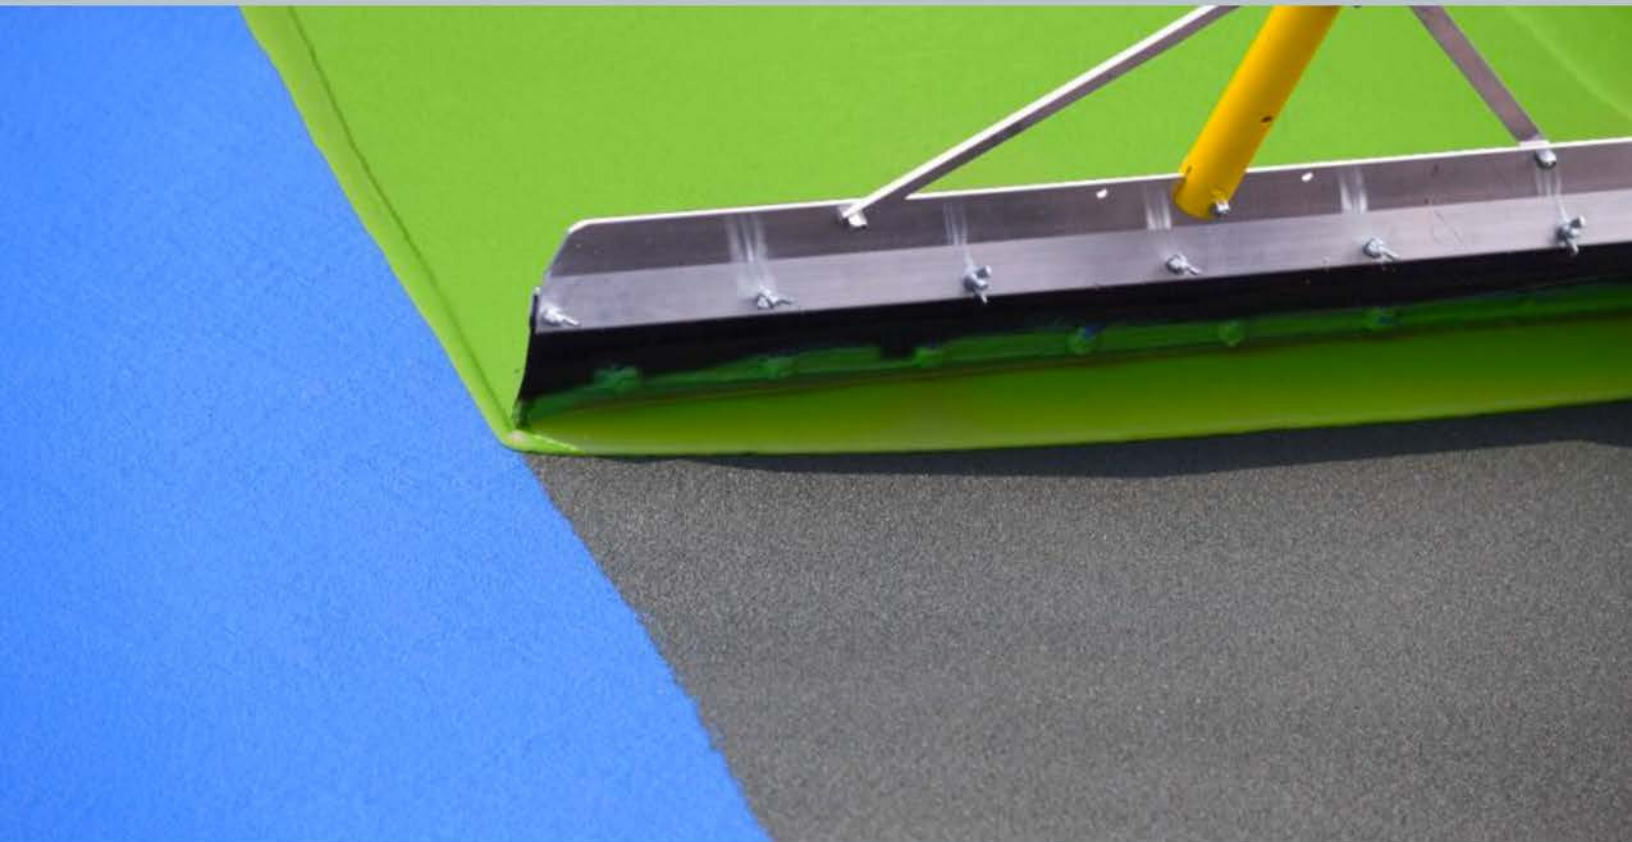

SURFACES THAT PERFORM.
SOLUTIONS THAT GO FURTHER.

TABLE OF CONTENTS



ACRYTECH **03**

CUSHIONX **17**

FAULTLINE **22**

ROLLX **27**

COURT ACCESSORIES **29**

INSTALLATION TOOLS **31**

WE ARE AT SPORTS

SINCE 1995, AT SPORTS HAS SPECIALIZED IN MANUFACTURING INNOVATIVE SPORTS COATINGS & MATERIALS, CUSHION SURFACES, PORTABLE SURFACES, COURT REPAIR SYSTEMS, AND MUCH MORE THAT ENSURES EVERY GAME IS PLAYED ON THE BEST POSSIBLE FOUNDATION.



ACRYTECH
SPORTS COATINGS



CUSHION X
CUSHION SPORTS SURFACES



ROLLY
PORTABLE SPORTS SURFACES



FAULTLINE
CRACK REPAIR

Member of the
ITF
Foundation



OFFICIAL SURFACE
INTENSE


OFFICIAL SURFACE
PPA
PICKLEBALL TOUR



Donald Young
AT Sports Sponsored Athlete

Meghan Dizon-Sheehan
AT Sports Sponsored Athlete

**OUR ACRYTECH LINE OF PRODUCTS FEATURE TOP-OF-THE-LINE
SPORTS SURFACE COATINGS AND SURFACING MATERIALS**

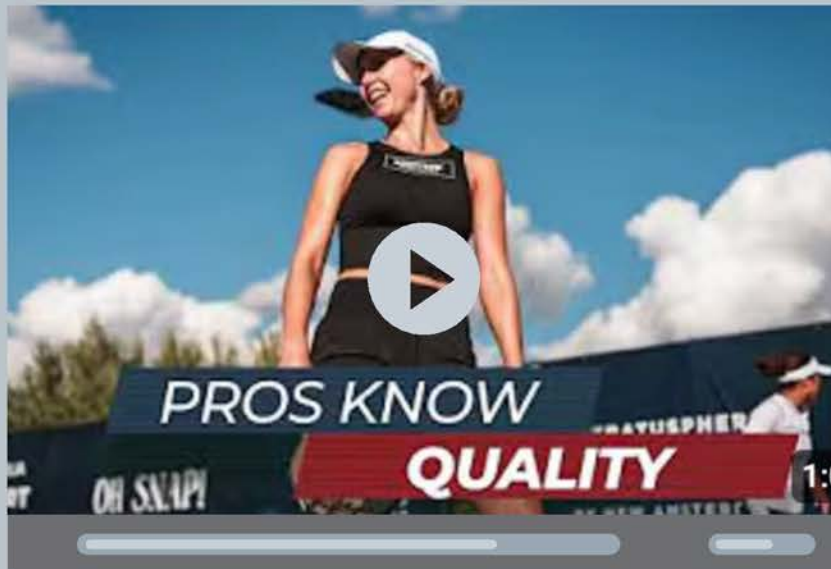

**AS THE OFFICIAL SURFACE FOR THE PPA – ACRYTECH IS
CRAFTED FOR SUPERIOR PERFORMANCE AND TRUSTED BY
PROFESSIONALS WHO RECOGNIZE AND PREFER THE HIGH
STANDARDS SET BY AT SPORTS.**

AT AT SPORTS, WE BELIEVE COLOR IS MORE THAN JUST A DESIGN CHOICE—IT'S AN EXPERIENCE. OUR ADVANCED TECHNOLOGY ENSURES OUR COLORS STAY BRIGHT, VIVID, AND CONSISTENT.

PLAYER'S CHOICE COLORS



SPECIALTY COLORS

SPECIALTY COLORS PRICES BASED ON PIGMENT



CUSTOM COLORS AVAILABLE

Digital displays can alter how colors appear from one screen to another. For true accuracy, please request a draw down from your installer or AT Sports representative. Samples are provided free of charge; only shipping costs apply.



COLOR

100% ACRYLIC LATEX COLOR COAT FORMULATION THAT USES ONLY THE HIGHEST QUALITY PIGMENTS AND COMPOUNDS WITH SELF-CROSSLINKING TECHNOLOGY.



WARRANTY: 2 YEARS

APPLICATION TEMPERATURE: 34-130°F

AVERAGE DRY TIME: 1-3 HOURS

AVERAGE CURE TIME: 24 HOURS

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum





COLORFLEX

100% ACRYLIC SELF-CROSSLINKING COATING FOR CUSHIONED SYSTEMS AND OVERLAYS. IDEAL FOR SUBSTANTIAL SUBSTRATE MOVEMENT AND FABRIC CRACK REPAIR SYSTEMS.



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.045-.06 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum





URETHANE COLOR

POLYURETHANE MODIFIED,
SELF-CROSSLINKING ACRYLIC
COATING DESIGNED FOR COURTS
THAT EXPERIENCE HEAVY TRAFFIC
AND USAGE.



WARRANTY: 2 YEARS

APPLICATION TEMPERATURE: 34-130°F

AVERAGE DRY TIME: 1-3 HOURS


AVERAGE CURE TIME: 24 HOURS

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

**39 gal in 55 gal drum*



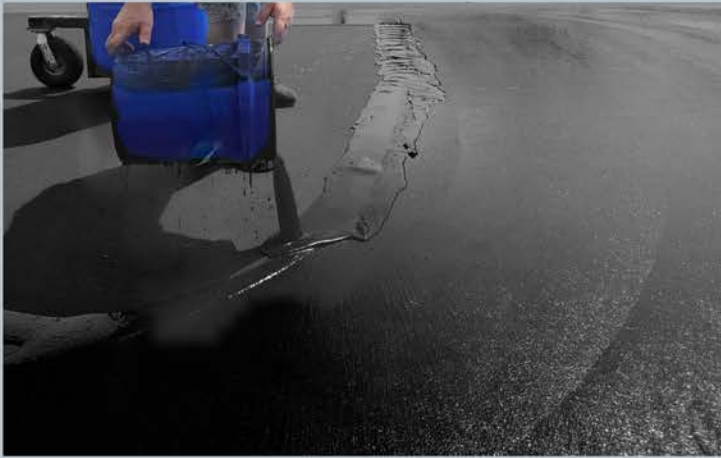

RESURFACER

100% ACRYLIC LATEX SELF-CROSSLINKING RESURFACER DESIGNED TO BE A FILLING AND REPAIR LAYER.



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.07 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.065-.075 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum



RESURFACER FLEX

100% ACRYLIC LATEX SELF-CROSSLINKING RESURFACER INTENDED FOR NEW AND EXISTING MEMBRANE OVERLAYS, ASPHALT AND CONCRETE SUBSTRATES.



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.045-.06 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.065-.075 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum



RESURFACER PLUS

100% ACRYLIC LATEX SELF-CROSSLINKING RESURFACER DESIGNED TO USE OVER COURT OVERLAYS, CRACK BRIDGING AND FILLING, & HEAVY RESURFACING.



WARRANTY: 2 YEARS


APPLICATION TEMPERATURE: 40-90°F

AVERAGE DRY TIME: 1-3 HOURS

AVERAGE CURE TIME: 24 HOURS

CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.07-.10 Gal per sq yd	560 lbs
30 - Gallon		300 lbs

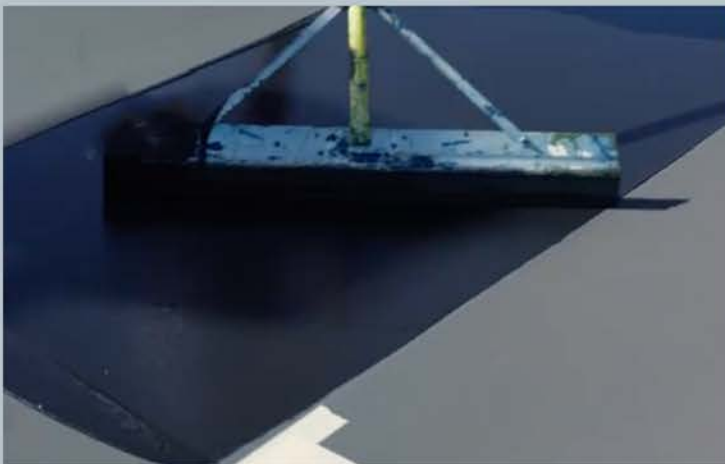

URETHANE RESURFACER

POLYURETHANE MODIFIED, SELF-CROSSLINKING ACRYLIC RESURFACER DESIGNED FOR CRACK BRIDGING AND FILLING, & HEAVY RESURFACING.



WARRANTY: 2 YEARS

APPLICATION TEMPERATURE: 34-130°F

AVERAGE DRY TIME: 1-3 HOURS

AVERAGE CURE TIME: 24 HOURS

CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs



ROLLER SPORTS

100% ACRYLIC LATEX SELF-CROSSLINKING COATING DESIGNED TO PROVIDE A FIBER REINFORCED, HIGHLY ABRASION RESISTANT SURFACE FOR ROLLER SPORTS.

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 72 HOURS

AVAILABLE IN PLAYER'S CHOICE COLORS ONLY

CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04- .045 Gal per sq yd	560 lbs
30 - Gallon		300 lbs



LINE PAINT

100% ACRYLIC LATEX TEXTURED PAINT THAT'S HIGHLY RESISTANT TO ULTRA-VIOLET DEGRADATION.



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 2-4 HOURS
AVERAGE CURE TIME: 24 HOURS

TENNIS

DESCRIPTION	COVERAGE	WEIGHT
White: 5 - Gal	480 linear feet	53 lbs
White: 1 - Gal		11 lbs
Black Light: 5 - Gal		53 lbs
Black Light: 1 - Gal		11 lbs

PICKLEBALL*

DESCRIPTION	COVERAGE	WEIGHT
White: 5 - Gal	480 linear feet	53 lbs
White: 1 - Gal		11 lbs
Black Light: 5 - Gal		53 lbs
Black Light: 1 - Gal		11 lbs

*higher sand volume



COLOR UV+

100% ACRYLIC LATEX SELF-CROSSLINKING SURFACING SYSTEM WITH ADDITIONAL UV RESISTANCE AND MICROORGANISM PROTECTION.



WARRANTY: 2 YEARS

APPLICATION TEMPERATURE: 36-130°F

AVERAGE DRY TIME: 1-3 HOURS

AVERAGE CURE TIME: 24 HOURS

CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs

TEXTURED

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum



COOLGUARD

TEXTURED, FLEXIBLE, 100% ACRYLIC LATEX SPORTS SURFACE TECHNOLOGY THAT REDUCES SURFACE TEMPERATURES UP TO 30%.



WARRANTY: 5 YEARS

APPLICATION TEMPERATURE: 36-130°F

AVERAGE DRY TIME: 1-3 HOURS

AVERAGE CURE TIME: 24 HOURS

CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.075-.09 Gal per sq yd	540 lbs
30 - Gallon		295 lbs



SHUFFLE BOARD

100% ACRYLIC LATEX SELF-CROSSLINKING COATING DESIGNED WITH SELECT SLIP-AGENTS TO PROVIDE AN IDEAL PUCK SLIDE.

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 50-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 48 HOURS

AVAILABLE IN PLAYER'S CHOICE COLORS ONLY

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.06-.07 Gal per sq yd	540 lbs
30 - Gallon		295 lbs



DRYING ACCELERANT

99% ISOPROPYL ALCOHOL THAT MAY BE USED AS A MIXING AGENT WITH ACRYTECH COATINGS TO ACCELERATE DRYING AS NEEDED.



REPLACE UP TO ½ TOTAL WATER WITH DRYING ACCELERANT TO SPEED DRYING.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	Not Applicable	560 lbs



WARRANTY: 2 YEARS
COLOR: HAZY - DRIES CLEAR
AVERAGE DRY TIME: 30 MIN - 1 HOUR
AVERAGE CURE TIME: 4 HOURS

URETHANE PRIMER

HIGHLY ABRASION RESISTANT, FLEXIBLE AND STRONG, NON-TACKY, 100% SELF-CROSSLINKING, MULTI-FUNCTION ALIPHATIC WATER-BASED POLYURETHANE PRIMER.



CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	17-22 Gal per sq yd	510 lbs
30 - Gallon		280 lbs
5 - Gallon		50 lbs



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 50-100°F
AVERAGE DRY TIME: 1-4 HOURS
AVERAGE CURE TIME: 24 HOURS

SOLVENT PRIMER & SEALER

SOLVENT-BORNE ACRYLIC PENETRATING SEALER & PRIMER, DESIGNED FOR CONCRETE & SURFACES CONTAINING FLY ASH AND/OR HIGH LEVELS OF LIMESTONE, & CLEAN CONCRETE WITHOUT ACID ETCHING, GRINDING OR MEDIA BLASTING.



CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	1st coat: 28-39 sq yds/gal 2nd Coat: 39-50 sq yds/gal	560 lbs
5 - Gallon		53 lbs



WARRANTY: 2 YEARS
COLOR: BLUE
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 3 HOURS

WATER-BASED PRIMER & SEALER

STYRENE-BUTADIENE LATEX PRODUCT DESIGNED TO WATERPROOF UNDERLYING PAINT OR SUBSTRATES AND PREVENTS THE LEECHING OF CONCRETE SALTS OR ASPHALT IMPURITIES INTO FOLLOWING LAYERS OF PAINT.



CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.05-.07 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs



WARRANTY: 2 YEARS
COLOR: WHITE - DRIES CLEAR
AVERAGE DRY TIME: 30MIN - 1 HOUR
AVERAGE CURE TIME: 4 HOURS

URETHANE CLEAR COAT

HARD, NON-TACKY 100% SELF-CROSSLINKING POLYURETHANE CLEAR COAT DESIGNED TO SEAL & EXTEND THE LIFE OF ALL ACRYTECH COATINGS.



READY TO USE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	22-33 Gal per sq yd	500 lbs
30 - Gallon		275 lbs
5 - Gallon		45 lbs



LINE PRIMER

100% ACRYLIC LATEX EMULSION CLEAR DRYING PRIMER APPLIED PRIOR TO ACRYTECH WHITE LINE PAINT.



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 48 HOURS

CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
1 - Gallon	480 linear feet at 2" wide	11 lbs



SLURRY COAT

SELF-LEVELING 100% ACRYLIC LATEX CEMENT ADMIX COATING FOR SMOOTHING ASPHALT OR PREPARED CONCRETE, FILLING CONTROL JOINTS, DEPRESSIONS, AND CRACKS UP TO 1/4", AND USE OVER EXISTING COATINGS.



CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.05-.07 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 40-120°F
COLOR: MILKY WHITE
AVERAGE CURE TIME: 48 HOURS



QUICK-DRY

OC FREE, 100% ACRYLIC LATEX
SELF-CROSSLINKING COATING DESIGNED
TO DRY AND CURE FASTER THAN STANDARD
COLOR.



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS


CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

**Available in Color, ColorFlex, Resurfacer, and Resurfacer Flex*



WELCOME TO THE FUTURE OF SPORTS SURFACES WITH CUSHIONX, THE PREMIUM CUSHION COURT SOLUTION

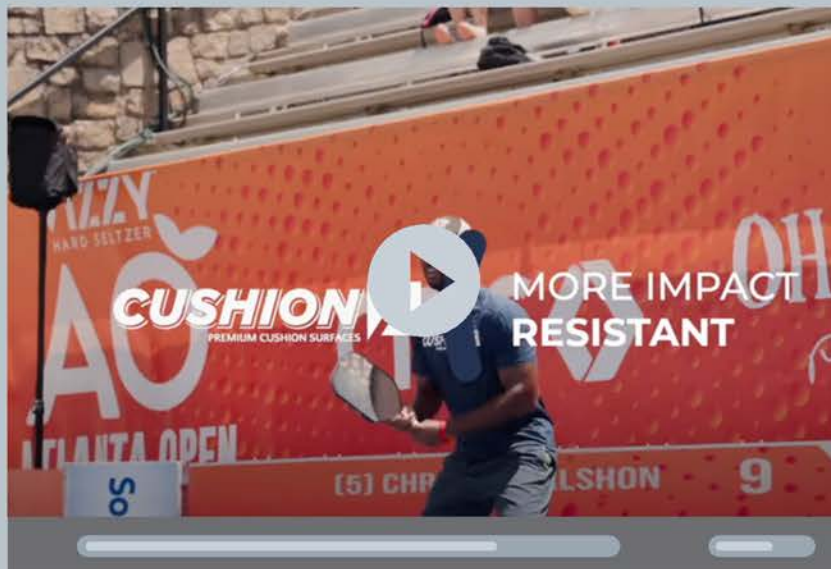

**CUSHIONX DELIVERS UNMATCHED IMPACT RESISTANCE AND
EXCEPTIONAL DURABILITY, ENSURING THAT ATHLETES CAN
ENJOY A SURFACE BUILT TO ENDURE THE DEMANDS OF
INTENSE ACTIVITY.**

THREE DISTINCT **CUSHIONX** COMPOSITION LEVELS HAVE BEEN EXPERTLY CRAFTED TO CATER TO DIVERSE AND SPECIALIZED USAGE NEEDS.



LEVEL 3

CLUB LEVEL & PRO TOURNAMENT USAGE


DESIGNED FOR TOP-TIER PERFORMANCE, LEVEL 3 ENHANCES LEVEL 2 WITH THREE LAYERS OF URETHANE FLEX COATINGS. THIS CONSTRUCTION WITHSTANDS HEAVY USE WHILE OFFERING EXCEPTIONAL IMPACT ABSORPTION AND COMFORT.



LEVEL 2

LIGHT & MODERATE COMMERCIAL USAGE

CRAFTED FOR SUPERIOR RESILIENCE, LEVEL 2 ENHANCES THE CAPABILITIES OF LEVEL 1 BY INCORPORATING AN EXTRA REINFORCED MEMBRANE LAYER TO MEET THE DEMANDS OF HIGH-TRAFFIC ENVIRONMENTS.

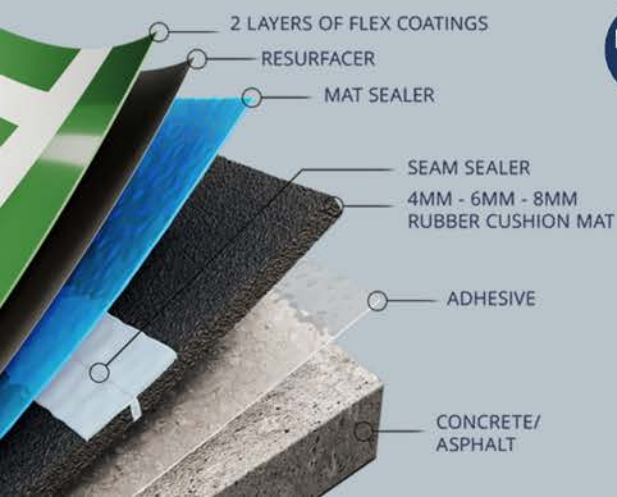

LEVEL 1

RESIDENTIAL & LIGHT COMMERCIAL USAGE

IDEAL FOR HOMES AND LIGHT-USE COURTS, LEVEL 1 INCLUDES A 4MM, 6MM, OR 8MM CUSHION MAT WITH THREE LAYERS OF FLEXIBLE COATINGS OFFERING DURABILITY AND COMFORT FOR RECREATIONAL PLAY.

*Water-based & urethane adhesives in spray & squeegee methods available



**AVAILABLE IN
4 MM - 6 MM - 8 MM**

CUSHION MAT

RUBBER SHOCK CUSHION MAT OVERLAY
PRODUCED WITH 86% POST-CONSUMER
RECYCLED CRUMB RUBBER.



PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
4 MM	5 ft x 60 ft	185 lbs
6 MM	5 ft x 60 ft	275 lbs
8 MM	5 ft x 60 ft	360 lbs



APPLICATION TEMPERATURE: 34-130°F
COLOR: WHITE - DRIES CLEAR
AVERAGE DRY TIME: 1-6 HOURS
AVERAGE CURE TIME: 24 HOURS

WATER-BASED ADHESIVE

CARBOXYLATED STYRENE BUTADIENE
PRESSURE SENSITIVE ADHESIVE DESIGNED
FOR PERMANENT ADHESION OF MAT
OVERLAYS OVER CONCRETE AND ASPHALT.



CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	60-65 Gal per sq yd	500 lbs
30 - Gallon		265 lbs
5 - Gallon		50 lbs



URETHANE ADHESIVE

SOLVENT FREE, ELASTIC, VISCOUS TWO-PART POLYURETHANE ADHESIVE DESIGNED FOR PERMANENT ADHESION OF MAT OVERLAYS OVER CONCRETE AND ASPHALT SUBSTRATES.



CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
5 Gallon Kit	60 Gal per sq yd	53 lbs

WARRANTY: 5 YEARS

APPLICATION TEMPERATURE: 50-130°F

AVERAGE DRY TIME: 45 MIN WORKING TIME



SEAM SEALER

SEALER DESIGNED TO PERMANENTLY BOND AND SEAL CUSHION MATS WHILE ENSURING A TIGHT, WATERPROOF SEAL THAT PREVENTS SHIFTING AND DAMAGE.



CONCENTRATE

DESCRIPTION	COVERAGE	WEIGHT
1 - Gallon	1 Gal per 8 Mat Rolls	11 lbs

WARRANTY: 5 YEARS

APPLICATION TEMPERATURE: 50-130°F

AVERAGE DRY TIME: 1-3 HOURS



APPLICATION TEMPERATURE: 36-130°F
COLOR: WHITE - DRIES CLEAR
AVERAGE CURE TIME: 30MIN - 1 HOUR

MAT SEALER

A CARBOXYLATED STYRENE BUTADIENE LATEX SEALER DESIGNED TO PROVIDE A STRONG TOP SEAL FOR MAT SURFACES TO PROTECT AGAINST WEAR AND TEAR.



CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	90 Gal per sq yd	500 lbs
30 - Gallon		265 lbs
5 - Gallon		53 lbs



WARRANTY: 2 YEARS
COLOR: AVAILABLE IN ALL COLORS
APPLICATION TEMPERATURE: 36-130°F

SQUEEGEE CUSHION

SQUEEGEE APPLIED CUSHION IS OUR PROPRIETARY MIXTURE OF 100% ACRYLIC LATEX, MINERAL FILLERS, AND FINELY GRADED EPDM AND SBR RUBBER PARTICLES THAT RESULTS IN A 3.5MM CUSHION SURFACE.



CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	Varies by layer	560 lbs
30 - Gallon		300 lbs

FAULTLINE

CRACK REPAIR

OUR FAULTLINE LINE OF PRODUCTS FEATURE MULTIPLE SOLUTIONS FOR YOUR COURT REPAIR NEEDS



FAULTLINE CRACK REPAIR PROVIDES ADVANCED SYSTEMS AND AN EXCLUSIVE KIT FOR MAINTAINING THE QUALITY AND PERFORMANCE OF YOUR COURTS.

THESE INNOVATIVE SOLUTIONS DELIVER LONG-LASTING RESULTS BY RESTORING THE COURT'S DURABILITY AND SMOOTHNESS



FILL-N-FIX

ADHESIVE/SEALANT WITH HIGH INITIAL TACK, DESIGNED FOR USE AS A CRACK AND JOINT FILLER FOR ASPHALT AND CONCRETE SUBSTRATES.



WARRANTY: 2 YEARS

APPLICATION TEMPERATURE: 35-140°F

AVERAGE DRY TIME: 30 MIN - 1 HOUR

TACK FREE TIME: 20 MIN

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
Case of 12 - 10.1 fl. oz. cartridge	Varies depending on crack size	13 lbs per case



SPORT PATCH

100% ACRYLIC LATEX BINDER, WHEN MIXED WITH PORTLAND CEMENT & SAND, PRODUCES A SEMI-FLEXIBLE LATEX CONCRETE THAT IS IDEAL FOR PATCHING DEPRESSIONS & FILLING CRACKS.



COLOR: MILKY WHITE

APPLICATION TEMPERATURE: 50-130°F

AVERAGE DRY TIME: 1-3 HOURS

AVERAGE CURE TIME: 24 HOURS

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	Varies depending on crack size	500 lbs
30 - Gallon		265 lbs
5 - Gallon		53 lbs



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
COLOR: MILKY WHITE - DRIES CLEAR
AVERAGE DRY TIME: 30MIN - 1 HOUR

SB GLUE

A CARBOXYLATED STYRENE BUTADIENE LATEX GLUE DESIGNED SPECIFICALLY FOR MODERN FABRIC AND FIBERGLASS CRACK REPAIR SYSTEMS.



CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	15-25 linear ft/gal	500 lbs
30 - Gallon		265 lbs
5 - Gallon		53 lbs



**TEST METHODS IN
 CONFORMITY WITH ASTM
 D1668-94 AND ASTM D579-90**

FIBERGLASS

HIGH STRENGTH, CRACK AND WRINKLE RESISTANT FIBERGLASS MESH MEMBRANE INTENDED FOR USE IN REPAIRING ASPHALT AND CONCRETE SUBSTRATES.



PROPERTIES	
DESCRIPTION	WEIGHT
36 in x 150 ft	Varies depending on roll size
60 in x 150 ft	



ADHERES FIRMLY TO
WITHSTAND HEAVY TRAFFIC
STRESSES

POLYESTER | POLYFIBER

HIGH STRENGTH & FLEXIBLE MEMBRANE &
TAPE DESIGNED TO SEAL & REINFORCE
SURFACE CRACKS & SEAMS.



DESCRIPTION	COVERAGE	WEIGHT
Polyester T325	40 in x 108 yds	Varies depending on roll size
Polyfiber	18 in x 180 ft	
Polyfiber	36 in x 180 ft	



CRACK FILLER REPAIR

POURABLE ACRYLIC LEVELER/CRACK
FILLER DESIGNED TO BE USED WITH
RESURFACER OR COLOR, SAND, AND
WATER TO REPAIR SMALL CRACKS AND
DEPRESSIONS.



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
5 - Gallon	Varies depending on crack size	53 lbs



FAULTLINE CRACK REPAIR KIT

A PROPRIETARY, PATENT PENDING, SYSTEM AND METHOD FOR PERMANENTLY REPAIRING EXISTING CRACKS ON SPORTS SURFACES.



THE THINNEST, PERMANENT, FULLY ADHERED SYSTEM CURRENTLY ON THE MARKET. KIT INCLUDES FAULTLINE POLYFIBER FABRIC AND TAPE.

DESCRIPTION	COVERAGE	WEIGHT
1 Crack Repair Kit	300 linear ft	33 lbs

OUR PORTABLE SPORTS SURFACES TRANSFORM ANY LEVEL, HARD FOUNDATIONAL SURFACE INTO A HIGH-PERFORMANCE PLAYING COURT



ROLLX IS A PREFABRICATED SPORTS SURFACE THAT IS
READY-FOR-PLAY; AND IS MADE FROM A REINFORCED MEMBRANE THAT
MAKES IT EXTREMELY DURABLE.

WHEN INSTALLED ON AN EVEN UNDERLYING SURFACE, ROLLX GIVES YOU
A DESIRED BOUNCE, AS WELL AS THE ABILITY TO PLAY WHEN YOU WANT,
AND ROLL IT UP WHEN YOU'RE DONE.



ROLLX COURTS

A PREFABRICATED COURT ENGINEERED TO PERFORM IN BOTH INDOOR AND OUTDOOR SETTINGS ON ANY LEVEL- UNDERLYING HARD SURFACE. MADE FROM A REINFORCED MEMBRANE & 4MM CUSHION MAT THAT MAKES IT EXTREMELY DURABLE.



AVAILABLE IN ANY PLAYER'S CHOICE OR SPECIALTY ACRYTECH COLOR. CUSTOM COLORS AVAILABLE UPON REQUEST.

NEW ROLLX COURTS

Engineered to offer complete design flexibility, allowing for customization of surface aesthetics to meet specific project requirements. Whether for branding integration, facility coordination, or event-specific applications, each court can be tailored in layout and visual design.

RECONDITIONED ROLLX COURTS

Need a cost-effective solution without sacrificing quality? Reconditioned RollX Courts are fully repaired and recoated to deliver performance that feels like new. These courts are available in the same customization options as new courts.

PRE-OWNED ROLLX COURTS

We also offer Pre-owned RollX Courts at an additional discount for a fast-deploy solution without the need for surface refinishing. These are sold as-is and are a great fit for training facilities or practice play.

AT SPORTS OFFERS SPECIALIZED TOOLS DESIGNED TO MOVE & HANDLE YOUR ROLLX COURT WITH EASE:

- ✓ Fork & Beam System – Ideal for forklift-compatible transport.
- ✓ Loading Dolly – A compact, maneuverable solution for roll loading and unloading.

COURT ACCESSORIES



**NET DIMENSIONS: 42 FT LENGTH X 3.5 FT
CENTER HEIGHT**

**POST HEIGHT: REGULATION 42 INCHES
ABOVE GROUND**

TENNIS NETS & POSTS

DESIGNED TO MEET STANDARD SPECIFICATIONS WHILE DELIVERING RELIABLE TENSION AND A CRISP NET PROFILE SUITABLE FOR COMPETITIVE & RECREATIONAL PLAY.

DESCRIPTION
3.0 mm Single Top with Center Strap
3.0 mm Double Top 6 with Center Strap
Net Posts 2 7/8 inches
Net Crank
Center Net Anchor



PROUD DISTRIBUTOR OF:



SELKIRK SEMI-PRO PORTABLE PICKLEBALL NET

SEMI-PERMANENT PRO NET FEATURES AN INNOVATIVE CORROSIVE-RESISTANT ALUMINUM FRAME FOR MAINTAINING THE EXCEPTIONAL QUALITY PROS TRUST.

FEATURES
Bow-spring tech maintains top tension
Ships in a box and assembles with minimal tools
Sleek Appearance
Weighing just 114 lbs for easy movement

COURT ACCESSORIES



PROUD DISTRIBUTOR OF:

DOMINATOR

DOMINATOR IN GROUND PICKLEBALL POSTS & NETS SYSTEM

HEAVY-DUTY, RUST-PROOF ALUMINUM IN-GROUND PICKLEBALL NET SYSTEM THAT MEETS USA PICKLEBALL OFFICIAL REGULATIONS.

FEATURES

Each post comes with a separate sleeve to be removed from the ground when not in use

6061 T6 aluminum with stainless steel hardware

Built with 1/8" thick aluminum walls

Crank system allows easy, adjustable net tension



PROUD DISTRIBUTOR OF:

DOMINATOR

DOMINATOR PRO MAX ROLLING PICKLEBALL NET

A COMPLETELY RUST-PROOF ALUMINUM NET FEATURING LOCKING WHEELS WITH 3" SQUARE SIDE POSTS AND ADJUSTABLE NET TENSION.

FEATURES

High-quality 6061 T6 aluminum

Locking wheels and a hand lever for easy movement

Attached hand crank, top wire cable, and fiberglass dowels provide adjustable tension

USA Pickleball regulation-size net system

INSTALLATION TOOLS



**IDEAL FOR COURT
PROFESSIONALS AND
MAINTENANCE CREWS**

SQUEEGEES

BUILT FOR PROFESSIONAL SURFACE PREP AND PAINT APPLICATION, THESE TOOLS ENSURE SMOOTH COATINGS, SHARP LINES, AND DURABLE PERFORMANCE.

DESCRIPTION
36 in Round Edge Squeegee
36 in Replacement Squeegee Blade
48 in Round Edge Squeegee
48 in Replacement Squeegee Blade
V-Squeegee
Notched Squeegee Head



**MADE TO WITHSTAND TOUGH
JOBSITE CONDITIONS &
RELIABLE PERFORMANCE**

SCRAPERS & MIXERS

ENGINEERED FOR SURFACE PREP AND MIXING TASKS, THESE TOOLS DELIVER PRECISION, DURABILITY, AND CONSISTENT RESULTS FOR PROFESSIONAL COATING APPLICATIONS.

DESCRIPTION
18 in Heavy Duty Floor Scraper
18 in Floor Scraper Replacement Blade
36 in Hex Shaft Paddle Mixer
48 in Hex Shaft Paddle Mixer

INSTALLATION TOOLS



**INSTALLER MUST-HAVES FOR
THE DAY TO DAY EFFICIENCIES**


MISCELLANEOUS TOOLS

ESSENTIAL FOR STORAGE, PREP, AND CLEANUP, THESE TOOLS ENSURE SAFE HANDLING, SURFACE PROTECTION, AND RELIABLE CONTAINMENT OF COATINGS AND MATERIALS.

DESCRIPTION
Siphon Pump
24 in Paper Rolls
5 Gal Pail With Lid
120 - 5 Gal Pails With Lids (Bulk)
5 Gal Bucket Holder



VISIT **ATSPORTS.COM** TO EXPLORE OUR INNOVATIVE PRODUCTS, DESIGN YOUR DREAM COURT WITH OUR INTUITIVE COURT DESIGNER, AND PLAN YOUR PROJECT EFFORTLESSLY USING OUR PRECISE PAINT CALCULATOR.

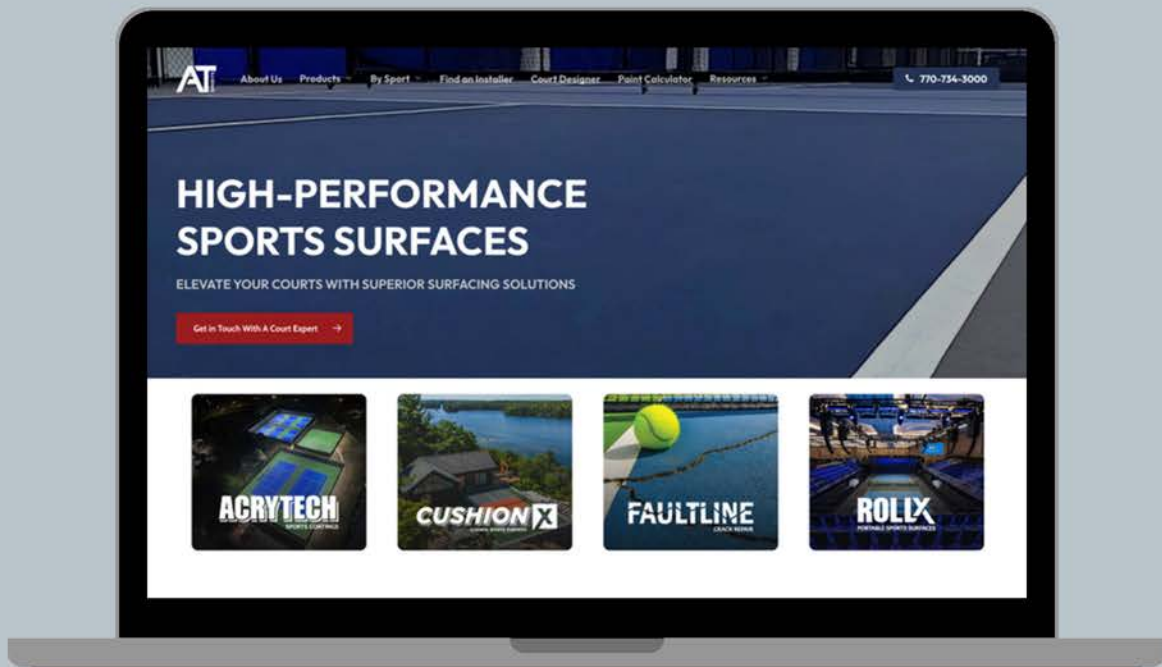

QUESTIONS?

GET CONNECTED WITH A COURT EXPERT

770-734-3000





ROLLX
PORTABLE SPORTS SURFACES

FAULTLINE
CRACK REPAIR

ACRYTECH
SPORTS COATINGS

CUSHIONX
CUSHION SPORTS SURFACES

189 Etowah Industrial Court, Canton, GA 30114